



International Energy Initiative

Latin America

IEI Board of Directors

Thomas Johansson
University of Lund
Sweden - Chairman

Anton Eberhard
University of Cape Town
South Africa - President

Amulya K.N.Reddy
Retired Professor
Indian Institute of Science
Bangalore - India

José Goldemberg
University of São Paulo
Brazil

Robert Williams
Princeton University
USA

Wim Turkenburg
Utrecht University
Netherlands

Supported by:

Gilberto M Jannuzzi
Universidade Estadual de
Campinas, Brazil
IEI Secretary

Eric Larson
Princeton University,
USA
IEI Treasurer

**A life-cycle cost analysis (LCCA) for
setting energy-efficiency standards in
Brazil: The case of residential
refrigerators**

Guilherme de C. Queiroz
queiroz@iei-la.org

International Energy Initiative – IEI
R. Shigeo Mori, 2013 Campinas 13084-082 SP

Gilberto De Martino Jannuzzi
jannuzzi@fem.unicamp.br

Departamento de Energia, Universidade Estadual de
Campinas.
C.P. 6122 Campinas 13083-970 SP

Edson A. Vendrusculo
edson@iei-la.org

International Energy Initiative – IEI
R. Shigeo Mori, 2013 Campinas 13084-082 SP

Thomaz Borges
thomaz@iei-la.org

International Energy Initiative – IEI
R. Shigeo Mori, 2013 Campinas 13084-082 SP

José A. Pomilio
antenor@dsce.fee.unicamp.br

Faculdade de Engenharia Elétrica e Computação
UNICAMP

May 2003

ENERGY DISCUSSION PAPER No. 2.56-01/03

Foreword

The **Energy Discussion Paper** series is intended to disseminate pre-prints and research reports organized or authored by members of the **International Energy Initiative** (Latin American Office) and its associates with the purpose to stimulate the debate on current energy topics and sustainable development.

Any comments or suggestions are welcome and should be addressed to the authors for consideration.

Gilberto M. Jannuzzi
Diretor (Latin America)
International Energy Initiative

Apresentação

A série **Energy Discussion Paper** tem o objetivo de disseminar os artigos e relatórios preparados pelos membros ou associados do escritório regional da **International Energy Initiative**. A intenção é estimular o debate sobre temas correntes na área de energia e desenvolvimento sustentável.

Comentários e sugestões são bem-vindos e devem ser encaminhados diretamente aos autores, para consideração e eventuais revisões.

Gilberto M. Jannuzzi
Diretor (Latin America)
International Energy Initiative

Queiroz, Guilherme de C.

A life-cycle cost analysis (LCCA) for setting energy-efficiency standards in Brazil: the case of residential refrigerators / Guilherme de C. Queiroz, Gilberto De Martino Jannuzzi, Edson A. Vendrusculo, Thomaz Borges e José A. Pomilio. – Campinas, SP: Energy Discussion Paper N° 2.56-01/03, 2003.

1. Energy Efficiency 2. Refrigerators

The ideas and opinions expressed in the paper do not represent, nor are necessarily endorsed by the International Energy Initiative and its Board of Directors.

Reproduction of the contents is permitted warranted that the source is mentioned accordingly.

Atenção

As idéias apresentadas neste documento não representam necessariamente as opiniões do International Energy Initiative e seu Conselho de Diretores.

Reprodução no todo ou parte do material apresentado é permitida desde que citada a fonte.

A LIFE-CYCLE COST ANALYSIS (LCCA) FOR SETTING ENERGY-EFFICIENCY STANDARDS IN BRAZIL: THE CASE OF RESIDENTIAL REFRIGERATORS

Abstract

The Brazilian law 10.295/2001 set the principles for the “National Energy Conservation Policy and Rational Use of Energy”. The law requires the development of energy standards for all of energy consuming equipment commercialized in the country. This paper presents the impacts of introducing cost-effective improvements in domestic refrigerators that were determined by means of a LCCA analysis. The analytical approach and computer simulation tool used in the study are the ones employed for the US DOE as well as the European Commission.

The results were used to estimate the impacts of efficiency standards on new refrigerators up to year 2020 assuming two hypothetical cases. Case A assumes that all new refrigerators sold have the efficiency innovations proposed here, Case B assumes that part of these innovations would be included in a first mandatory standard enforced in year 2005 and in 2010 a second mandatory standard would consider all the innovations analyzed.

The electricity consumption per refrigerator in *Case A* can be reduced by 43% (in 2005) with currently known and available technologies. The payback time to the consumer (12% interest rate) is calculated to be 7 years (lower than the 16 years average life time). Over 2005-2020 period, Brazil would save around 80 TWh, Brazilian consumers would save more than 12 Billion R\$ on their electricity bills and the nation would save 38,000 GgCO₂ (due to avoided CO₂ emissions from natural gas power plants).

In *Case B*, we assume two mandatory standards, one enforced in year 2005 that yields a 24% reduction. A second mandatory standard set in 2010 reduces by 48% (compared to the base year 2000 refrigerator consumption). The payback time was calculated as 7 and 12 years, respectively. Over 2005-2020 period, Brazil would save 70 TWh, the consumers would save 9 billion R\$ and the nation would save 34,000 GgCO₂.

1. Introduction

In Brazil until recently the labels were used on a voluntary basis. However, the Brazilian government has introduced compulsory legislation to introduce minimum efficiency standards, which should be mandatory in the next years.

The main objective of this study is the application of the LCCA methodology as a tool to propose efficiency standards for the Brazilian residential refrigerators. Some assumptions were adopted in order to allow the construction of all methodological stages. In some cases it was necessary to rely on numerical estimates to supply missing data. For instance, as it will be seen, the choice of the 2 cases (Case A and Case B) was based on

sales of the two most popular refrigerator manufacturer brands in the country (both represent 93% of the market¹).

The CLASP (2001) manual “Energy Efficiency Labels and Standard - a guidebook for appliances, equipment and lighting” presents three approaches/analysis for the establishment of minimum efficiency standards. A statistical approach is one option for analyzing the desirable level of a proposed standard. For each refrigerator model, energy use is plotted as a function of adjusted volume² and a linear regression analysis is performed. The two other approaches are engineering/economic and LCCA/payback (consumer, industry, national, and environmental impacts). In the case of the methodology using the statistical approach, the criteria for minimum appliance efficiency is recommended to be based on the possibilities of technical improvements for the whole stock of refrigerators, or at least a significant portion of them. In this study, it was used the economic/engineering and LCCA/payback approaches to create the % energy saving lines based in two models improvements, reducing substantially the number of necessary simulations for the establishment of efficiency criteria. Whenever data on production costs were missing, we based our estimates based on literature or information from North American refrigerator industry.

Due to lack of good statistical information on all models sold in Brazil, the study considers only two refrigerators models (the most sold model from each one of the two main manufacturers). These models were used to simulate two representative situations for the entire refrigerator stock described later in the paper. The LCCA methodology, proposed in CLASP (2001) manual, IEA (2000) and DOE (1995), has been considered here for evaluating some possible technical innovations with regards to their impacts in the economy and environment. The choice of the LCCA methodology is a contribution to the on going discussions to implement compulsory minimum efficiency standards in the country.

1.1 The Brazilian electricity market: general issues

In year 2000, a total of 306.3 TWh of electricity was produced in Brazil, 43% of this was consumed by the industrial sector, 27% by the residential and 15% by the commercial sector (BEN, 2001). The residential refrigerator is the largest user of electricity in the residential sector (32% of residential consumption), according to the National Program of Electric Power Conservation (PROCEL, 1998).

1.2 Main characteristics of Brazilian refrigerators

The most sold refrigerators in the country are popular models suited to the lower purchasing power of the population. They are one-door models with a self-contained

¹ Statistics on market share sales by refrigerator models are not available in Brazil. The percentages presented in this report refer to manufacturers participation in total annual sales. This report assumes that manufacturers' one-door model maintain these proportions.

² Adjusted volume = Refrigerator Volume +1.42 *Congelador* Volume. *Congelador* is a small freezer compartment placed inside the refrigerator and present in Brazilian one-door models.

small freezer compartment (*congelador*) inside the refrigerator. They have a single cooling cycle, where the evaporator and the condenser operate by natural convection. In general, most of these models do not have complex controls or accessories; however, this has been changing recently as new manufacturers are competing in the domestic market. The average electricity consumption of these popular models is about 1kWh per day.

INMETRO (National Institute of Metrology, Standards and Industry Quality), in partnership with PROCEL (National Program of Electric Power Conservation), has a labeling energy efficiency program that now has the voluntary participation of a single-door refrigerator models. This program is further described in the Internet site of INMETRO (www.inmetro.gov.br).

Table 1 presents the mains characteristics of one-door refrigerators as analyzed by INMETRO.

Table 1: single-door refrigerators analyzed by INMETRO/Procel Label

Brand	Model	VOLUMES			Electricity consumption (kWh/month)	Procel Label
		Refrigerator	Freezer	Adjusted volume = Refrigerator +1.42 Congelador		
BOSCH	RB 31	297	00	297	24.5	A
BOSCH	RB 38	367	00	367	27.0	A
BRASTEMP	BRA31A	253	33	300	32.0	C
BRASTEMP	BRA35A	296	33	343	36.0	C
BRASTEMP	BRB35A	329	00	329	36.5	D
BRASTEMP	BRF36A	330	00	330	29.5	A
CCE	R31L	263	30	306	30.0	B
CCE	R32SL	268	30	311	30.0	B
CCE	R26L	224	30	267	32.0	D
BLUE SKY	R31L	263	30	306	30.0	B
HOUSTON	R31L	263	30	306	30.0	B
CONSUL	CRB23B	223	00	223	32.0	F
CONSUL	CRC24B	191	22	222	30.5	F
CONSUL	CRA32A	272	31	316	26.6	A
CONSUL	CRA32B	272	30	315	24.9	A
CONSUL	CRC32A	272	31	316	28.8	A
CONSUL	CRA36A	312	30	355	31.5	A
CONTINENTAL	RC 27	223	29	264	23.7	A
CONTINENTAL	RC 30	257	29	298	27.0	A
CONTINENTAL	RC 37	324	33	371	33.0	A
ELECTROLUX	R250	214	26	251	24.6	B
ELECTROLUX	R280	237	26	274	25.0	A
ELECTROLUX	R310	263	31	307	30.0	B
ELECTROLUX	R330	286	31	330	30.2	A
ELECTROLUX	R360	312	31	356	32.4	A
ESMALTEC	RG3100E	283	27	321	34.8	B
GE	GE310A	263	31	307	30.0	B

Source: INMETRO, 2001

It is important to recognize that there are autonomous energy efficiency improvements in the industry. It is possible to verify by the annual update in the INMETRO/Procel Label (see new electricity consumption by refrigerator model in the site www.inmetro.gov.br). It is also possible to verify by the laboratory tests that will be presented in the EEDAL (third International Conference on Energy Efficiency in Domestic Appliances and Lighting – EEDAL 2003) that shows an actual 340 kWh/year base case consumption, around 5% more efficient than the 360 kWh/year presented here). The LCCA method as applied here has not considered autonomous energy efficiency improvements in the scenarios calculation.

2. Methodology

2.1 The choice of the two refrigerator models and the LCCA method

In order to choose refrigerator models as base-cases, or references, for this study, we observed the market share of the various existing models. As explained previously, available Brazilian statistical information suggested that the refrigerator model that is currently the market leader (53% of annual sales) already incorporates several technological innovations and is quite efficient from its competitors. The choice of a refrigerator that already had several innovations could not be a representative case to illustrate the LCCA method used. The second best selling model chosen has 29% of the current market and is less efficient than the market leader, but it allows illustrating the impacts of technological innovations and the LCCA method. This model is also more representative of other one-door refrigerators.

The analysis for the whole stock of refrigerators is based on these two models and considered two scenarios, namely Case A and Case B.

2.2 The Cases considered

Case A scenario (100% of the market is taken by the less efficient model) assumes that all refrigerators in the one-door category sold in the country are the same as the second model described.

Case B scenario (53% is taken up by the more efficient model and 47% by the less efficient model) is more realistic and assumes that improvements suggested are applicable only to 47% of the existing market; and therefore the standard is set at a lower efficiency level as the one considered in Case A, as will be presented later. At a later stage further improvements are enforced to all refrigerators. Case B therefore simulates the application of two standards over time.

Therefore, the analysis presented is based on the first and the second best selling model, as of year 2000.

2.3 LCC Method

We follow the methodological itinerary proposed by the CLASP (2001) manual, as detailed in the Chapter 6 – “Analyzing and Setting Standards”. The results presented here were obtained from the application of the methodology there described. The two approaches adopted in this study are an engineering/economic and LCCA/payback analysis. An engineering/economic analysis shows the extra manufacturing costs that accompany increases in energy efficiency. These must be weighted against the target reductions in energy costs. The engineering/economic approach does not prescribe that manufacturers meet the standard using the technical options used in the analysis. It simply ensures that there is at least one practical way to meet the standard. Once the engineering/economic analysis is completed, it is customary to analyze the economic impact of potential efficiency improvements on consumers by analyzing consumer payback period and life cycle cost (LCC). There are separate methodologies for

estimating consumer LCC and payback period, national energy savings and economic impact, manufacturer impact, energy supply impacts, and environmental impacts.

Another support document which was relied on, especially with regards to the format of presenting our results, was “Technical Support Document: Energy Efficiency Standards for consumer products: Refrigerators, Refrigerator-Freezers, & Freezers” of DOE (1995).

The LCC is the sum of the purchase cost (P) and the annual operating costs (O) discounted over the lifetime (N, in years) of the appliance (see Box 1). Compared to the payback period, LCC includes consideration of two additional factors: lifetime of the appliance and consumer discount rate.

Box 1 - Calculating LCC and Payback Period

The equation for LCC is a function of price (P) and annual operating cost (O):

$$LCC = P + \sum_{t=1}^N \frac{O_t}{(1+r)^t}$$

P = retail price to the consumers (R\$); O = operating costs (electricity tariff etc.);

r = discount rate (real to the consumers); N = life time (years);

t = time (years) from the base case (appliance acquisition)

If operating expenses are constant over time, the above equation reduces to:

$$LCC = P + PWF * O$$

where the PWF (present worth factor) equals:

$$PWF = \sum_{t=1}^N \frac{1}{(1+r)^t} = \frac{1}{r} \left[1 - \frac{1}{(1+r)^N} \right]$$

Payback period (PAY) is found by solving the equation:

$$\Delta P + \sum_{t=1}^{PAY} \Delta O_t = 0$$

for PAY. The Delta signifies the difference from the base case to the standards case. Delta P is an increase in price and Delta O is a decrease in operating costs. In general, PAY is found by interpolating between the two years when the above expression changes sign. If the operating cost (O) is constant over time (t), the equation has the simple solution:

$$PAY = - \frac{\Delta P}{\Delta O}$$

Source: (CLASP 2001; Biermayer 2001)

3. Results

3.1 Costs and Performance Analysis

3.1.1 Technical alternatives

Based on the INMETRO data, manufacturers and literature, simulations of technical improvements were analyzed using the software ERA/EPA. The Brazilian refrigerator used in Case A was a model of 330 liters of adjusted volume and 360 kWh/year of electric power consumption. In Case B, a 320-liter model of adjusted volume and 320 kWh/year of electric power consumption was analyzed. The technical innovations chosen for the analysis are presented in Table 2.

Table 2: Efficiency, consumption, standard and cost of the technological innovations

Description		% Energy Savings (a)		Payback (Years)		Cost (R\$)
		Case A	Case B	Case A	Case B	
Base-case (C0)	Existing voluntary Procel label A set as a Mandatory Efficiency Standard	4.0 %	4.0 %	0	0	0
Innovation 1 (C1)	Base-case + more efficient compressor	20.7 %	16.1 %	4	6	60
Innovation 2 (C2)	Innovation 1 + increase of the door insulating thermal thickness - 1,27cm	3.8 %	3.9 %	5	7	20
Innovation 3 (C3)	Innovation 2 + increase of the wall insulating thermal thickness - 1,27cm	14.0 %	12.0 %	7	9	67
Innovation 4 (C4)	Innovation 3 + increase of the door insulating thermal thickness - 2,54cm	2.8 %	2.9 %	8	10	18
Innovation 5 (C5)	Innovation 4 + increase of the wall insulating thermal thickness - 2,54cm	10.0 %	9.2 %	9	12	53

Source: innovations costs in dollars using the exchange of 21/august/2002 US\$ 1.00 = R\$ 3,30 (DOE 1995).

(a) Efficiency values were estimated using the simulation software ERA/EPA (Merriam, Verone & Feng 2002).

4. LCCA Results


4.1.1 Statistical method

Data presented in Table 1 was used to fit a linear regression given by:

$$\text{Consumption (KWh/month)} = 21.1678 + 0.0279 \times \text{adjusted volume}$$

Figure 1 presents the INMETRO data and the regression results. The refrigerator model used in the calculations is also represented on the graph, together with the results obtained introducing the technical improvements.

Figure 1 - Linear regression using INMETRO refrigerators (Table 1) data, and possible technological innovations – Case A

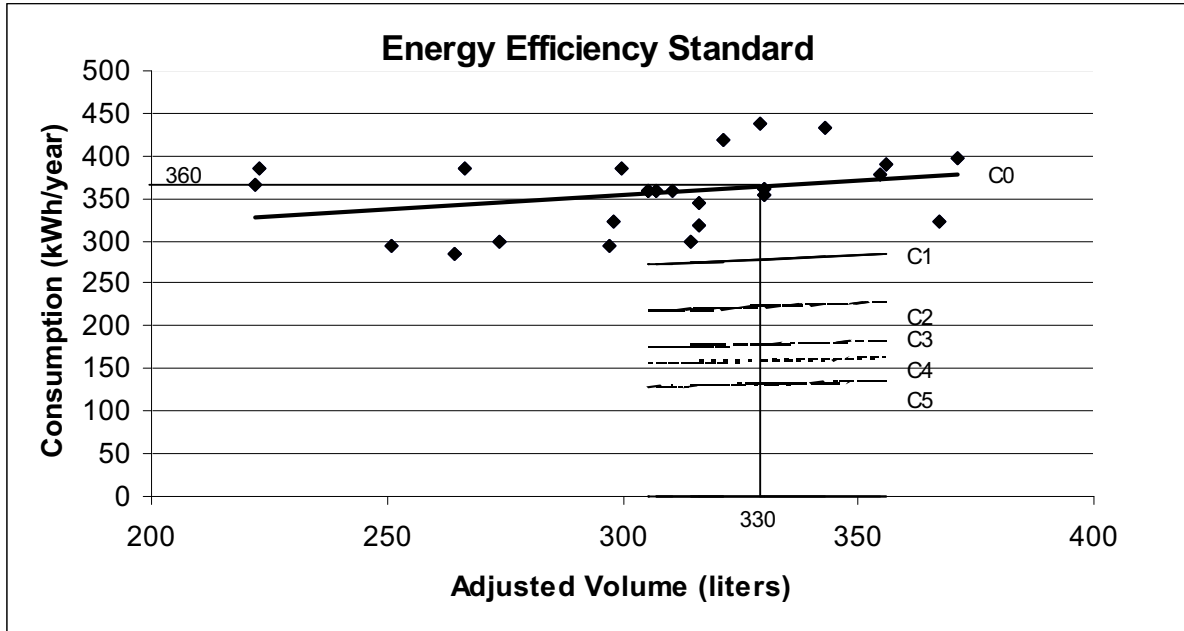

These statistical regressions performed using INMETRO data can be converted into standards recommendations for minimum energy consumption of energy. All the curves (C1, C2 etc.) are results of the new linear regressions that substitute the real models by the more efficient models in accordance with the suggested innovations (described in C1, C2, etc) in case A and case B (weighted efficiency index).

The C0 line regression, suggested that it is possible to get 4%³ reduction if the Procel label A is a mandatory standard (all less efficient models - represented by the points above the solid line - will be forced to come down to the mandatory standard line). The second refrigerator model used as base-case (Case B hypothesis) lies exactly on the segment of straight line of the regression (C0).

According to the statistical methodology, in order to use regression results as recommendation for minimum standards, we should perform new simulations for each set of technical innovations for all models and then run a new regression based on the simulation results. These calculations are displayed as lines C1, C2, ..., C5, where 1,2,..5 represent the innovations presented in Table 2.

Table 2 presents the simulations results obtained using the ERA computer model⁴ and available cost data. The percentage energy savings represent the average values per refrigerator for cases A and B.

³ This is the arithmetic average of the reduction in electricity consumption of all the models above the regression line. We have not considered the market share participation of each model.

⁴ The ERA model was adapted to incorporate as close as possible the technical characteristics of Brazilian refrigerators considered.

4.1.2 Engineering/Economic Analysis

Assuming a retail price of R\$ 699.00 (14 August 2002) for a 330 and 320 liter refrigerator, the innovations costs described as in the Table 2, and the factor 2.42 - the Brazilian markup factor (consumer cost / manufacturer cost of refrigerators) - it is possible; assuming a 12% per year discount rate, to calculate the Payback Period curve (Figure 2), and to build the curve for the engineering/economic analysis (Figure 3) of refrigerator efficiency standards.

Figure 2: Payback Period Analysis


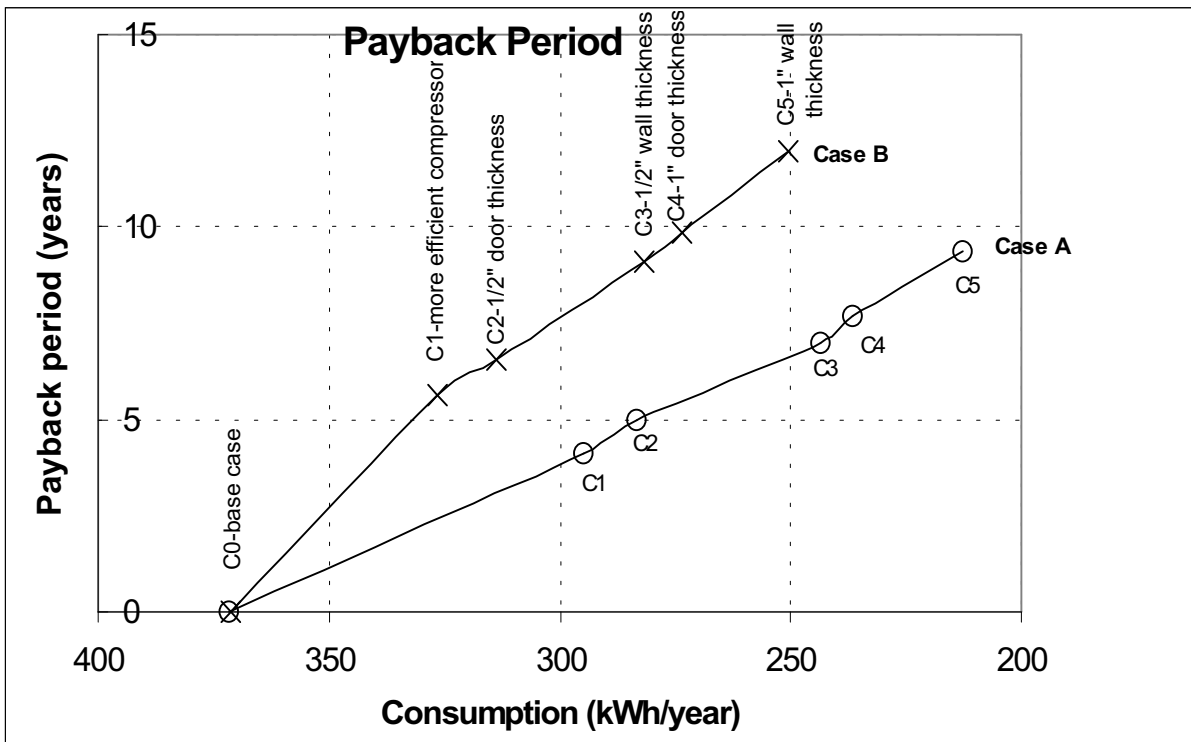


Figure 3: Engineering/Economic calculations

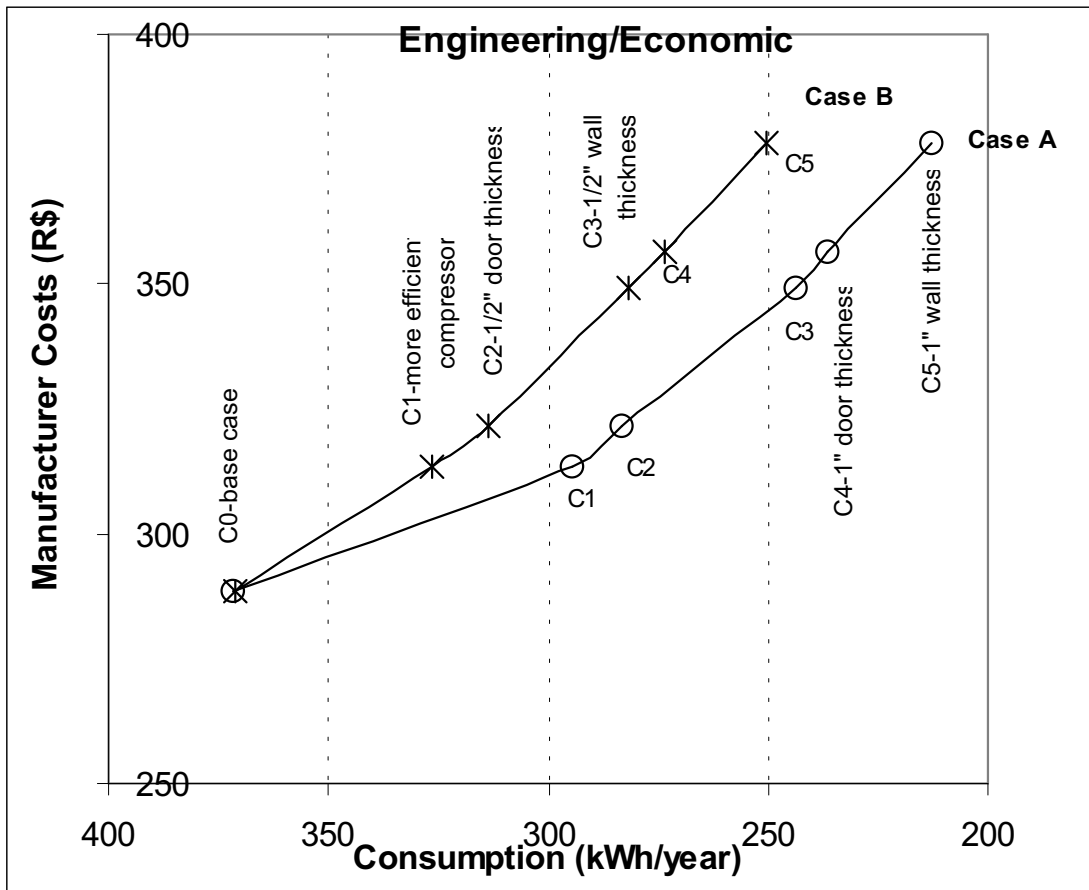


As expected, manufacturer's costs increases as innovations are introduced and electricity consumption is reduced (Figure 3). When all innovations are considered the total payback period rises to 12 years approximately, which is high, but less than the expected 16 years of useful refrigerator lifetime assumed by manufacturers (Figure 2).

4.1.3 Life cycle cost (LCC) Method for the consumer

Assuming a 16-year useful lifetime for the refrigerator model, a 12% return rate and the electricity price 252 R\$/MWh, including the 18%⁵ of tax on the tariff of *Agência Nacional de Energia Elétrica* (ANEEL 2002), it is possible to construct Figure 4 of LCC LCC for the consumer:


⁵ It is assumed tax of 18% as a national average, because there are different estate taxes in Brazil.

Figure 4 – Life Cycle Cost (LCC) - Popular Brazilian Refrigerators

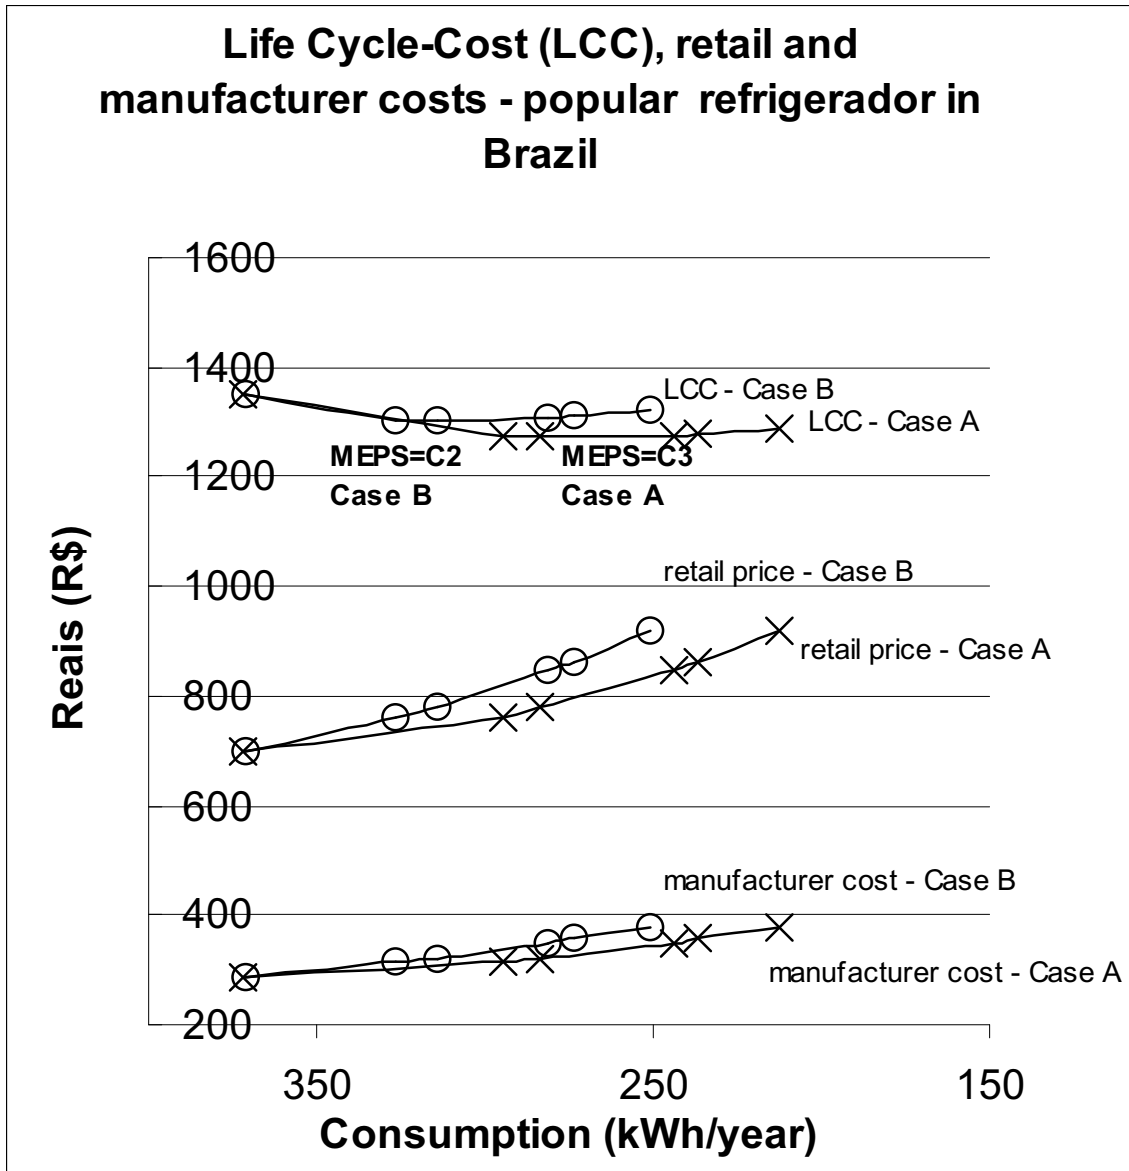

The life-cycle cost analysis performed for Case A (Figure 5) which considered the popular Brazilian one-door refrigerator model suggests that the standard has to be set at the C3 (MEPS - *minimum energy performance standards* of 43%) level. MEPS is the point of the lowest LCC to consumers and has, in this case, a 7 years payback period. However, with a sensitivity analysis (changing the USA costs of improvements to a better change/exchange rate – 1US\$ = 2 R\$), it is possible to propose a mandatory standard of 55% (C5) to 2005 (that maintains a LCC to the consumer lower than the base-case LCC).

Figure 5 – LCC Sensitivity Analysis – Case A - Popular Brazilian model

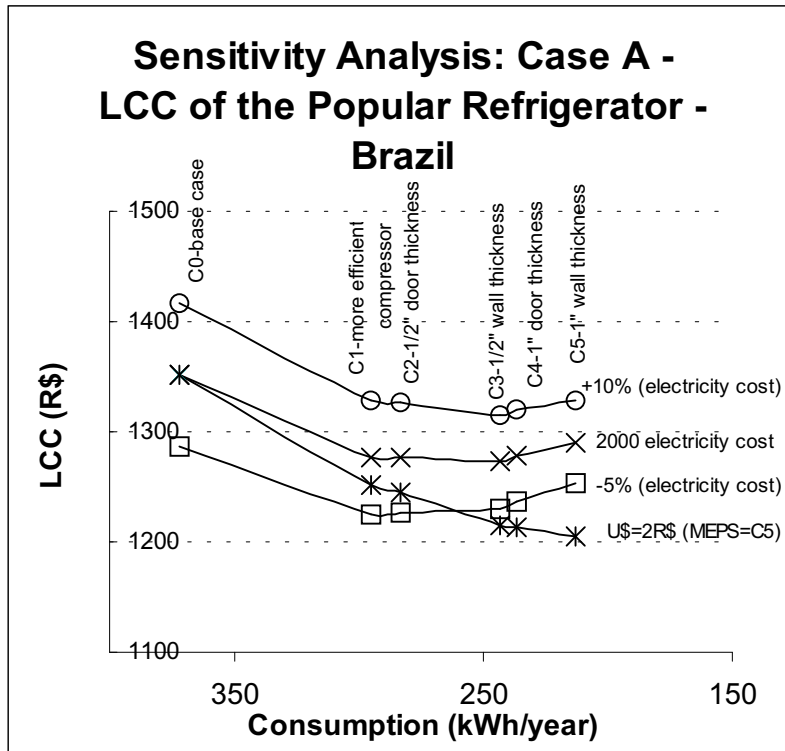

In the Case B Life Cycle Cost Analysis it was used the same structure of the linear regression of the refrigerator units sold in Brazil (with the lifetime calculation of the refrigerators based on these vintages and the household penetration too).

The Case B hypothesis incorporates in the analysis the 4% obtained from the mandatory standard based on the existing Procel label A (innovation C0 in Table 2) and 20% from innovations C1 and C2 (Table 2), totalizing 24% (MEPS = C2) for a first standard in 2005. The second standard would be 48% assuming all improvements (Table 3).

Table 3 – Summary Results

Indicators	Case A	Case B
Mandatory Standards (energy reduction)	43% (year 2005) (*)	24% (first standard in 2005)(*) 48% (second standard in 2010)(*)
Payback Period	7 years	7 years (first standard)/12 years (second standard)
Improvements	- Voluntary Procel label A like a mandatory standard, new compressor, increase of the door and walls insulating thermal thickness - 1/2".	- Voluntary Procel label A like a mandatory standard, new compressor, increase of the door insulating thermal thickness - 1/2" (first standard); - All improvements analyzed (second standard).
Energy saved (TWh)	12 (until year 2010) 80 (until year 2020)	7 (until year 2010) 70 (until year 2020)
CO ₂ Conservation (Gg)	38,160 (2005-2020 period)	33,759 (2005-2020 period)
Billion R\$ saved on the electricity bill	12 (2005-2020 period)	9 (2005-2020 period)

Notes: It was assumed a coefficient 0.48 kg CO₂/kWh (emission from Natural gas fuelled thermoelectric plant). All values were calculated in R\$ (2000). (*) compared to the 2000 refrigerator model.

5. Conclusions

The use of tools and methods that simulate the refrigerator performance according to proposed technical innovations and the use of life cycle cost analysis show that it is possible to obtain significant reductions in electricity consumption in Brazilian refrigerators.

The results represent important inputs to subsidy further discussion with manufacturers in the process of setting-up efficiency standards for Brazilian refrigerators.

The paper suggests that the amount of savings can be in the range of 24-43% in year 2005 if the MEPS are adopted. The improvements are the implementation of the mandatory standard, more efficient compressors and increase of the door and walls insulating thermal thickness (1/2"), all cost effective with a payback period of 7 years. Over 2005-2020 period, the amount of energy savings can be in the range of 70-80 TWh, the amount of CO₂ conservation can be in the range of 34,000-38,000 Gg and the Brazilian consumers would save around 9-12 billion R\$ (reais).

6. References

- ANEEL 2002. *Tarifas de energia elétrica*. Acesso ao site www.aneel.gov.br em 24/07/2002.
- BEN 2001. *Balanço Energético Nacional – ano base 2000*. Disponível em www.mme.gov.br.
- Biermayer 2001. *Life-Cycle Cost Analysis: Refrigerators*. Ernest Orlando Lawrence Berkeley National Laboratory (LBNL), IRAM, Buenos Aires, 23 march.
- CLASP 2001. *Energy-Efficiency Labels and Standards: A Guidebook for Appliances, Equipment, and Lighting*. Lead authors: Stephen Wiel and James E. McMahon,

- Collaborative Labeling and Appliance Standards Program (CLASP), 205p. February.
- Decreto 4.059 / 2001. (*Regulamenta a Lei nº 10.295*). Casa Civil da Presidência da República, 19/dezembro/2001.
- DOE 1995. *Technical Support Document: Energy Efficiency Standards for consumer products: Refrigerators, Refrigerators-Freezers, & Freezers*. U.S. Department of Energy, 391 p., July.
- IEA 2000. *Energy Labels & Standards: energy efficiency policy profile*. International Energy Agency/Org. for Economic Co-operation and Development, 194 pgs.
- INMETRO 2001. *Produtos Etiquetados*. Instituto Nacional de Metrologia, Normalização e Qualidade Industrial. Disponível em www.inmetro.gov.br/consumidor/prodEtiquetados.asp#pbe. [acesso em 08/agosto/2002]
- Lei 10.295 / 2001. (*Dispõe sobre a Política Nacional de Conservação e Uso Racional de Energia e dá outras providências*). Senado Federal, 17/outubro/2001.
- Merriam, Verone & Fengnd. *EPA refrigerator Analysis (ERA) program: User's manual*, version 1.2E, Cambridge, Mass: Arthur D. Little, Inc.
- PROCEL 1998. *Resultados de 1998*. Programa Nacional de Conservação de Energia. Disponível em <http://www.eletrobras.gov.br/procel/1.htm> [acesso em 4/julho/2001].

7. Acknowledgements

The authors would like to thank the financial support received from the International Energy Agency/Climate Technology Initiative, the International Energy Initiative, the Environmental Protection Agency and the São Paulo Research Council (FAPESP).



What is IEI?

- A Southern-conceived, Southern-led and Southern-located South-South-North partnership.
- A small, independent, international non-governmental public-purpose organization led by internationally recognized energy experts, and with regional offices, staff and programmes in Latin America, Africa and Asia.

What is IEI's Mission?

- To build local capacity and analysis, and to engage locally and globally, so as to promote energy for sustainable development.

What is IEI's strategy?

- Focusing on developing countries
- disseminating an approach to energy, in which the level and quality of energy *services* is taken as the measure of development, rather than the magnitude of energy consumption and supply
- improving energy services through end-use efficiency measures and the increased use of environmentally cleaner new and renewable energy technologies
- ensuring that market restructuring and/or liberalization in the electricity and petroleum industries focuses on measures that expand the provision of public benefits
- addressing policies, regulation, institutions, financing and management issues to promote sustainable energy practices
- initiating and strengthening capability in energy analysis, information, advocacy, and implementation in developing countries

IEI Regional Offices

Africa

Prof Anton Eberhard
University of Cape Town,
Private Bag Rondebosch 7701, South Africa
[Tel: +27-21-406 1922; Fax: +27-21-406 1412]
E-mail: eberhard@gsb.uct.ac.za

India

Antonette D'Sa
25/5 Borebank Road, Benson Town,
Bangalore 560 046 India
[Tel/Fax: +91-80-353 8426]
Email: ieiblr@vsnl.com

Latin America

Prof Gilberto Jannuzzi
Universidade Estadual de Campinas - UNICAMP
C.P. 6122 13083-970 Campinas SP BRAZIL
[tel/fax: +55-19-3788-3282
fax/ans.mach.+55-19-3289-2038/3722]
E-mail: jannuzzi@fem.unicamp.br